

## IMPORTANT: READ THIS FIRST

Before removing your LED from your current XLR 250 Flashlight, install your new Kill Light® XLR 250X Tailcap and Whisper Silent Dimmer™ Switch. If your LED dims and functions correctly, there is no need to change your LED.



**Changing your XLR 250X LED is as simple as 1 - 2 - 3**

### Step 1



Unscrew the head of the light. Note where the head unscrews in the picture.

### Step 2



Unscrew the LED from the base of the light.

Choose the LED you would like to use and screw it into the base of the light.

### Step 3



Replace the head of the light by screwing it back onto the base.

---


**If the beam is fuzzy or has a dark spot, your XLR 250X is out of focus.**

### Out of Focus



It is best to test your light against a blank wall in your house to fine tune the beam. If the head of the light is not screwed on tight enough, the beam will be uneven, rough, and could have a dark spot in the center.

### Adjust the Focus

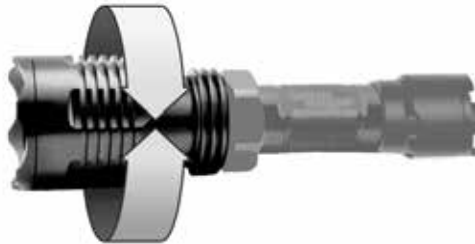

Tighten the head of the light until the beam is free from any dark spots or uneven areas.

### Properly Focused



If the head of the light is tight and it is still not focused properly, then you may need to insert one or two of the included spacers during step three above.

If you have questions, please email us at [info@elusivewildlife.com](mailto:info@elusivewildlife.com)